

# MUGNAINI

— SINCE 1989 —

## Masonry Assembled

MODEL: 100 AOS

### FLAT ROOF ENCLOSURE

### COMMERCIAL WOOD FIRED OVEN

#### CLEARANCES:

Install the oven with a minimum 2 inches clearance on sides and back to combustible construction. Consult the manual for enclosure instructions.

#### VENTING:

The oven can be vented in two methods:

1. Direct vent using 8 inch chimney pipe listed to UL 103 HT and installed per UL 737.
2. Indirect vent using a Type 1 hood system installed per UL 2162.

#### SHELF:

Concrete shelf to be covered with granite or similar material. Exact dimensions subject to owners preference.

**WEIGHT:** 1080 lbs. (oven components only).



#### UTILITIES:

No electricity or gas required.

#### NOTE:

The oven should be installed in accordance with all relevant local and national codes and in a manner acceptable to the authority having jurisdiction.

Progressive changes in technology and product development may necessitate changes to specifications without notice.

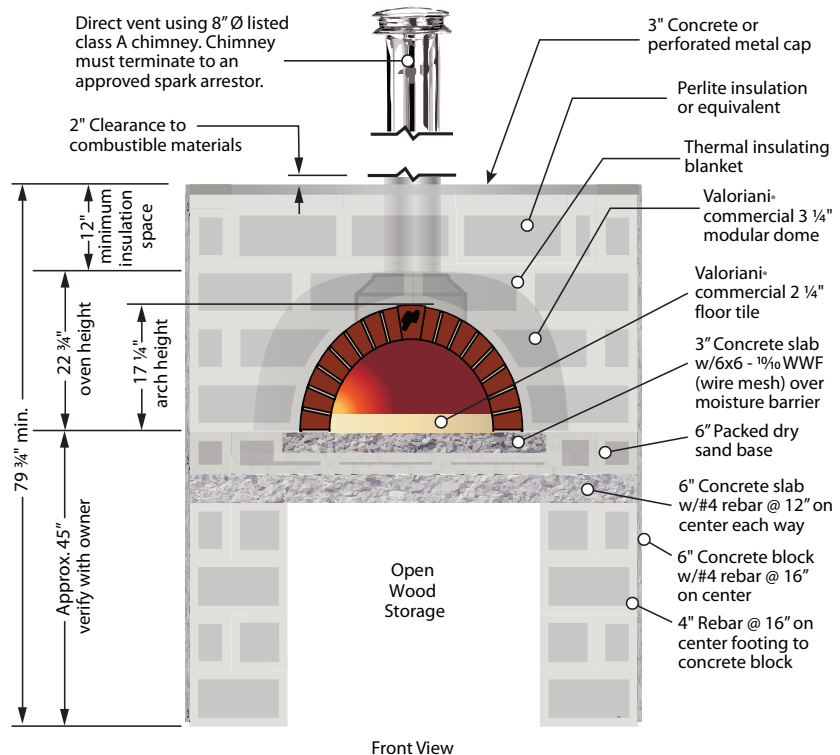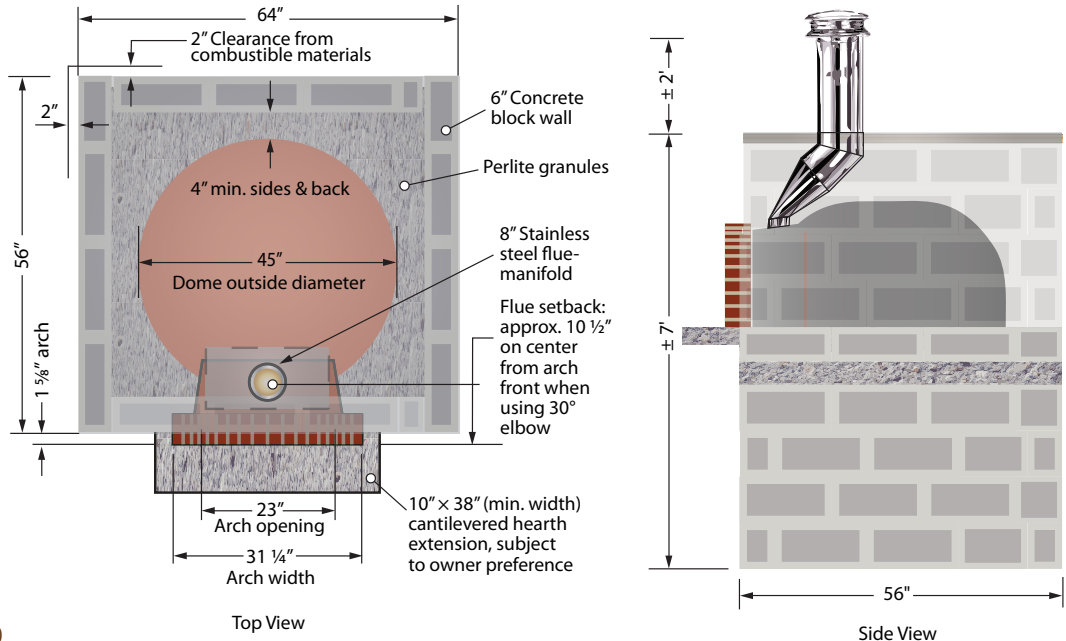

UL 2162 and UL 737



ANSI/NSF-4

© COPYRIGHT 2012, Mugnaini Imports, Inc. May not be used without permission of copyright holder.

Mugnaini Imports, Inc. • 1530 Grove Street, Healdsburg, CA 95448  
main: (707) 416-4106 • toll free: (888) 887-7206 • fax: (707) 857-7177  
mugnaini.com • mugnaini@mugnaini.com