

# MUGNAINI®

— SINCE 1989 —

## Mugnaini Series

MODEL: 100 PA

### BARREL ROLL ENCLOSURE

COMMERCIAL WOOD FIRED OVEN

#### CLEARANCES:

The oven shall be installed a minimum of 2" away from combustible material from back wall to oven and side wall to oven. You may bridge the gap between any wood framing and the oven by using metal framing with concrete board or masonry.

#### VENTING:

The oven is direct vented with a 8" chimney pipe listed to the UL 103 HT standard. The chimney starts with an anchor plate and requires a minimum rise of 36" for the oven to properly draft. The Chimney must terminate to a UL listed spark arrestor installed 2' taller than any structure within a 10' radius. Venting is not included as it varies depending on installation requirements.

#### SHELF:

Shelf to be covered with non-combustible material provided by client.

#### NOTE:

The oven should be installed in accordance with all relevant local and national codes and in a manner acceptable to the authority having jurisdiction. Progressive changes in technology and product development may necessitate changes to specifications without notice.

#### UTILITIES:

No electricity or gas required.

#### COLOR:

Call office for color choices.



#### FLOOR HEIGHT:

45-48"

#### WEIGHT: 2800 lb.



© COPYRIGHT 2013, Mugnaini Imports, Inc.  
May not be used without permission of copyright holder.

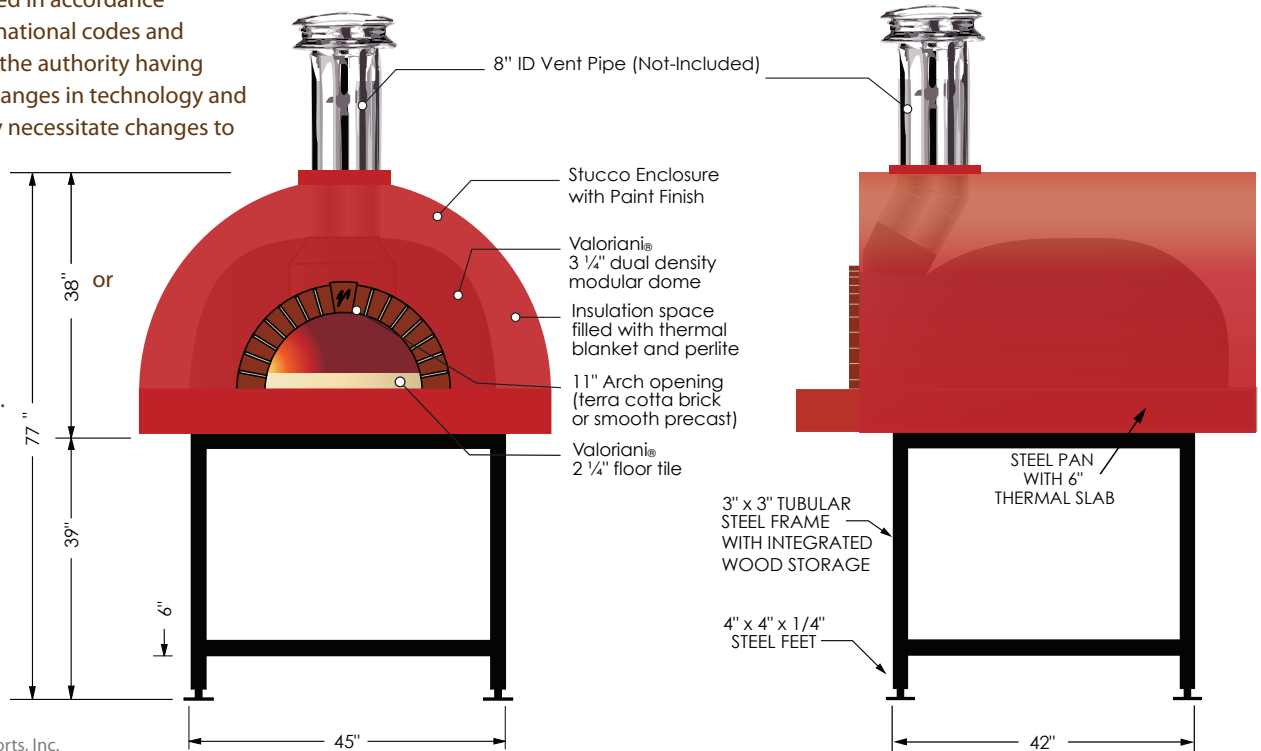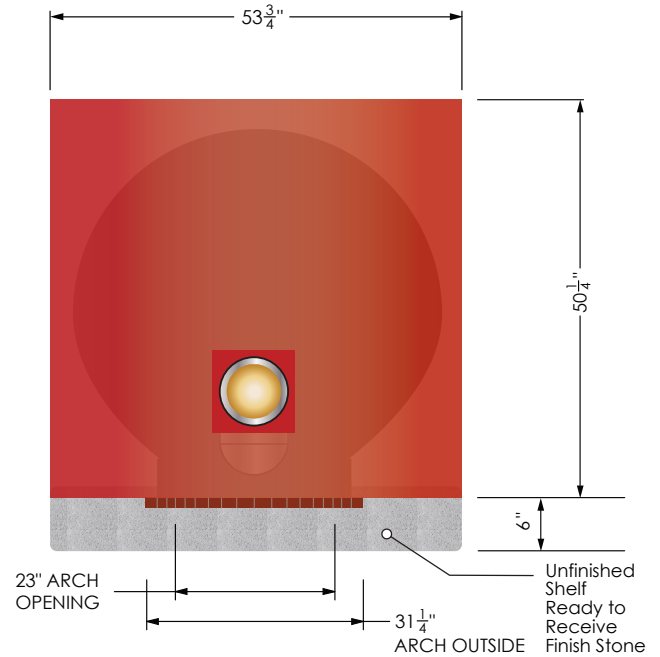

Mugnaini Imports, Inc. • 1530 Grove Street, Healdsburg, CA 95448  
main: (707) 416-4106 • toll free: (888) 887-7206 • fax: (707) 857-7177  
mugnaini.com • mugnaini@mugnaini.com