

# MUGNAINI®

— SINCE 1989 —

## Mugnaini Series

MODEL: G180 x 140 PA

**BUILT-IN ENCLOSURE**

COMMERCIAL GAS FIRED OVEN

### CLEARANCES:

Install the oven with a minimum  
1 inch clearance on sides and back to combustible construction.  
Consult the manual for enclosure instructions.

### VENTING:

The oven can be vented in two methods:

1. Direct vent using 8 inch chimney pipe listed to UL 103 HT and installed per UL 737.
2. Indirect vent using a Type 1 hood system installed per UL 2162.

### SHELF:

Stainless steel shelf bolts to oven. Shelf to be covered with non-combustible material provided by installer.

### UTILITIES:

Provide 3/4" N.P.T. gas supply and 120VAC / 1.1 AMP electrical supply.  
232,000 total BTU (116,000 BTU /burner) natural or propane.

### DUAL BURNER SYSTEM:



2 Independent Spitfire New Generation  
Burners. Automatic w/ manual override.

**WEIGHT:** 5800 lb.

### NOTE:

The oven should be installed  
in accordance with all relevant  
local and national codes and  
in a manner acceptable to the  
authority having jurisdiction.

Progressive changes in technology  
and product development may  
necessitate changes to  
specifications without notice.

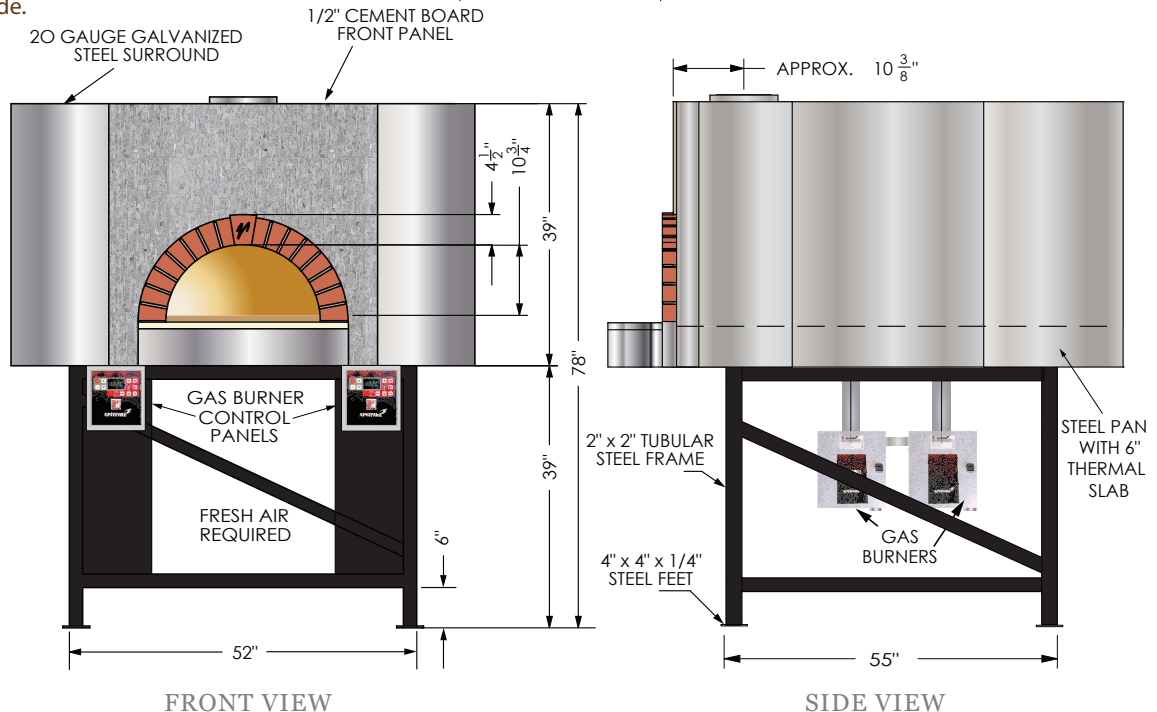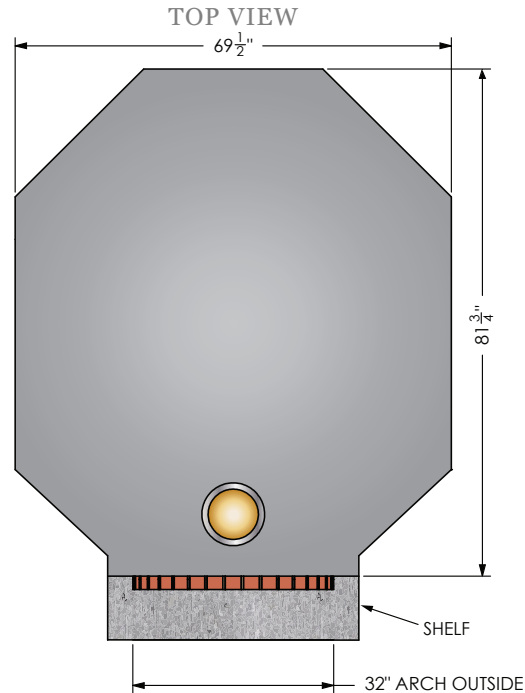

UL 2162 and UL 737



ANSI-Z83.11  
CAN/CGA-1.8



ANSI/NSF-4

© COPYRIGHT 2012, Mugnaini Imports, Inc. May not  
be used without permission of copyright holder.

Mugnaini Imports, Inc. • 1530 Grove Street, Healdsburg, CA 95448  
main: (707) 416-4106 • toll free: (888) 887-7206 • fax: (707) 857-7177  
mugnaini.com • mugnaini@mugnaini.com