

CLEARANCES:

Install the oven with a minimum 1 inch clearance on sides and back to combustible construction. Consult the manual for enclosure instructions.

VENTING:

The oven can be vented in two methods:

1. Direct vent using 8 inch chimney pipe listed to UL 103 HT and installed per UL 737.
2. Indirect vent using a Type 1 hood system installed per UL 2162.

SHELF:

Stainless steel shelf bolts to oven. Shelf to be covered with non-combustible material provided by installer.

WEIGHT: 3950 lb.

UTILITIES:

Provide 3/4" N.P.T. gas supply.
116,000 BTU natural or propane.
120VAC / 1.1 AMP electrical supply.


BURNER SYSTEM:

Spitfire New Generation Burner.
Automatic w/ manual override.


NOTE:

The oven should be installed in accordance with all relevant local and national codes and in a manner acceptable to the authority having jurisdiction.


Progressive changes in technology and product development may necessitate changes to specifications without notice.



© COPYRIGHT 2012,
Mugnaini Imports, Inc.
May not be used without permission of copyright holder.

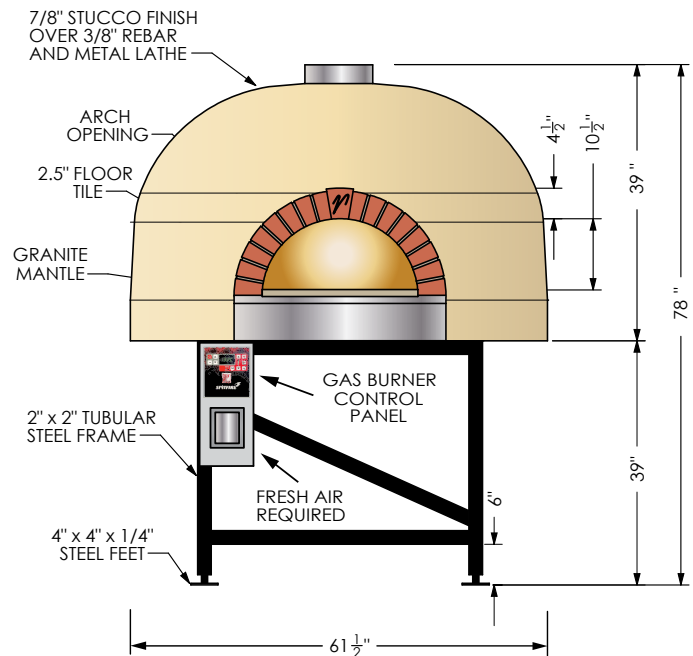

FRONT VIEW

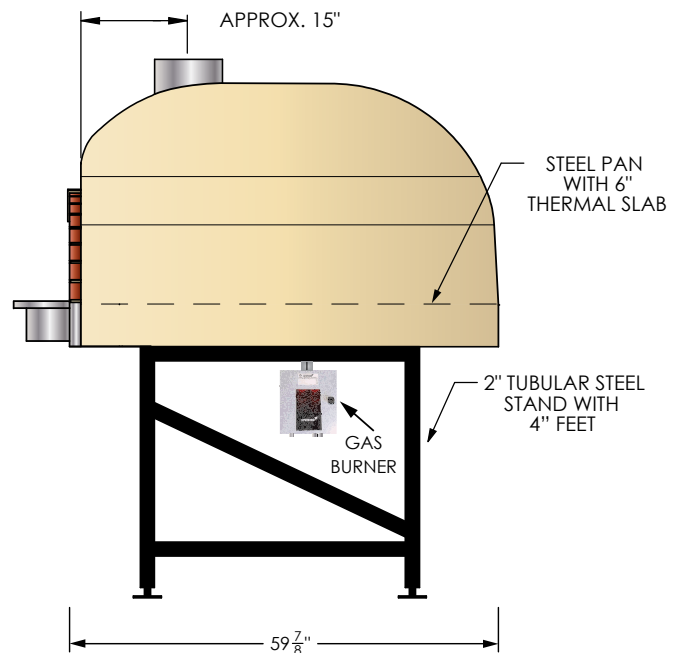

SIDE VIEW



Mugnaini Imports, Inc.
11 Hangar Way, Watsonville CA 95076
888.887.7206 | 831.761.1767 | Fax: 831.728.5570
www.mugnaini.com | mugnaini@mugnaini.com